

# Hemispheric IP Door Station T25

ecl-ips



## Complete Panorama View

from wall to wall and from ceiling to floor thanks to Hemispheric technology

## Recording with sound

of all activities in front of the door, automatically around the clock

## Two-way video worldwide

via IP telephony or computer with remote door-opening function

## Integrated messaging features

for leaving and retrieving messages directly at the door

## Keyless entry

using PIN code or transponder with intelligent time control

## Simple installation

optional use of two existing bell wires instead of network cable


## Based On The International VoIP/SIP Video Telephony Standard


The new **T25 IP Video Door Station** from MOBOTIX offers a modern, powerful solution that is easy to install and that has never been available to the market until now

## Better Overview, Increased Security, More Possibilities.



Complete Panorama view from wall to wall – everything reliably in one view

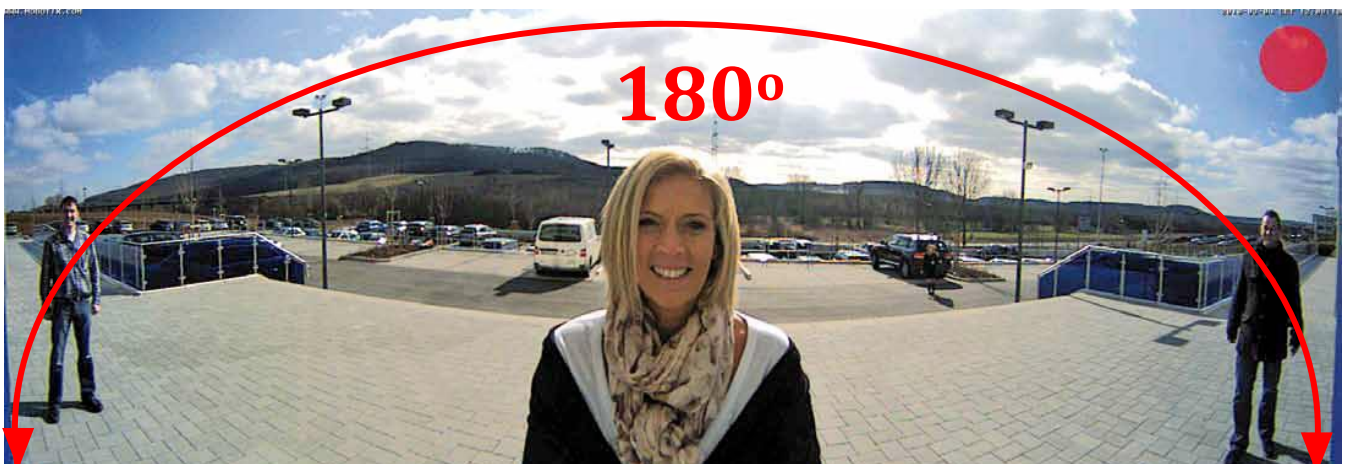

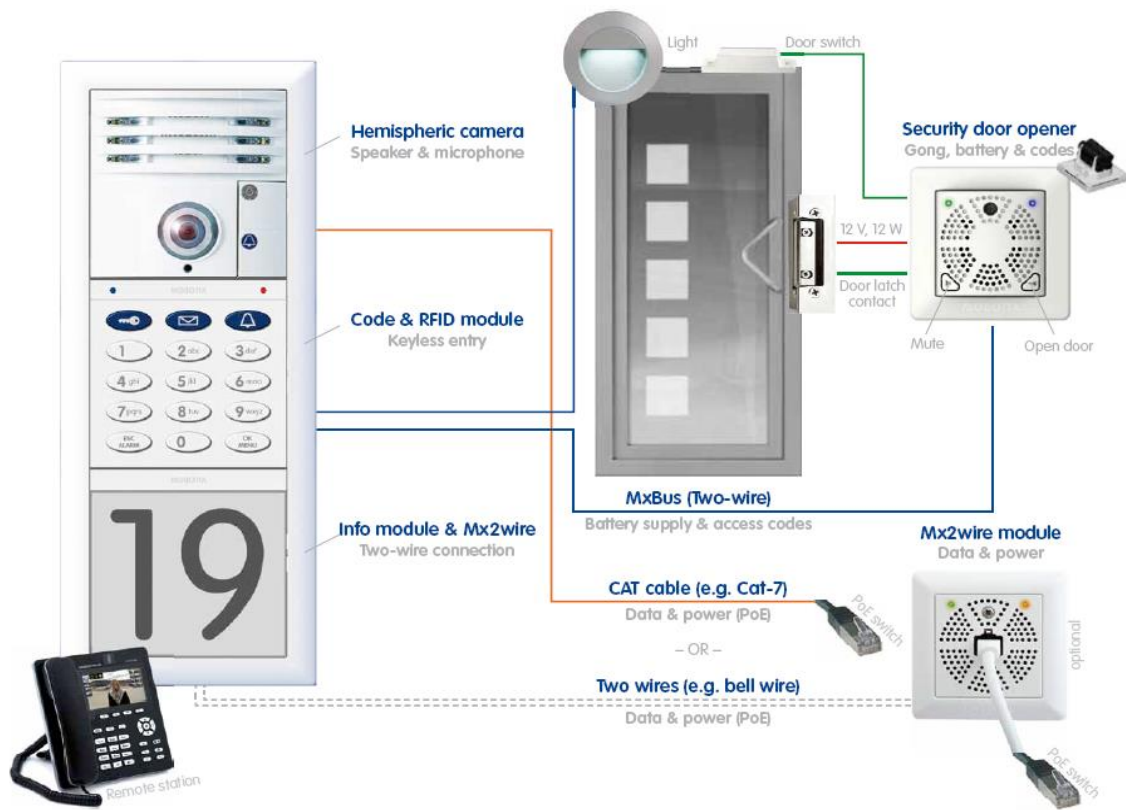

The new T25 IP Video Door Station from MOBOTIX offers a modern, powerful solution that is easy to install and that has never been available to the market until now.



The T25 is based on the international video telephony standard VoIP/SIP. When the doorbell rings, a connection is established with an IP video phone or a standard computer via the network. This means that, from anywhere in the world, you can conduct video conversations with visitors at your door or open the door remotely.

#### MOBOTIX HiRes video replaces up to 6 cameras ...

- Individual choice of lens: tele/wide-angle, day/night, CSVario and hemispheric (180°)
- Wide range of applications from 180°-panorama webcam to video security
- Fast, simple installation on wall, pole or ceiling
- Integrated DVR with HiRes video recording without network load
- Robust, low-maintenance and weatherproof from -30 to +60 °C (-22 to +140 °F), (IP66)
- Digital continuous zoom, pan and tilt
- Integrated microphone and speaker with improved sound quality

#### HiRes Video Innovations

The German company MOBOTIX AG is known as the leading pioneer in network camera technology and its decentralized concept has made high-resolution video systems cost efficient.

Who is authorized into the building and when? The door opener can be controlled, simply and securely, via a PIN code or an RFID transponder using the individually configurable access module. The security door opener that is installed inside next to the door is powered by the door station via MxBus two-wire cable and also functions as the door gong thanks to the speaker (that can be switched off).

The door station can be connected and supplied with power via an Ethernet cable (PoE technology) or alternatively with the Mx2wire extension set via a bell wire. This way, with very little effort, an existing door communications device can be upgraded into a versatile access control system with a high-resolution, multifunctional MOBOTIX camera.

The weatherproof Outstation (IP65) is available in 4 attractive colors (white, metallic silver, dark gray and amber).

The Hemispheric T25 camera module also fits in the Siedle Vario installation systems. The individual Siedle modules will be integrated using a special IO connection board developed by MOBOTIX.camera.

